



ALMA H.265 4MP IP CAMERA IP-5IR4042



Features :

- ✓ 4.0 MEGAPIXEL, HIGH RESOLUTION, TRUE COLOR
- ✓ H.265 MP、H.264 BL/MP/HP、MJPEG
- ✓ CMOS PROGRESSIVE SCAN, PERFECTLY CAPTURE THE MOVING OBJECT
- ✓ 20~30M IR NIGHT VIEW DISTANCE
- ✓ ICR AUTO SWITCH FOR DAY/NIGHT FUNCTION
- ✓ SUPPORT 3D NOISE REDUCTION FUNCTION, DIGITAL WDR, DEFOG, STEADY SHOT
- ✓ IP66 INGRESS PROTECTION
- ✓ DC12V / POE




www.alma-asia.com www.almacctv.com www.facebook.com/almacctv

COPYRIGHT BY ALMA TECHNOLOGY SDN. BHD. ALL RIGHT RESERVED

DISTRIBUTE BY :





Design and specifications are subject to change without notice.

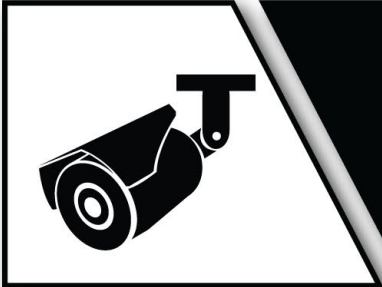

ALMA H.265 4MP IP CAMERA

IP-5IR4042

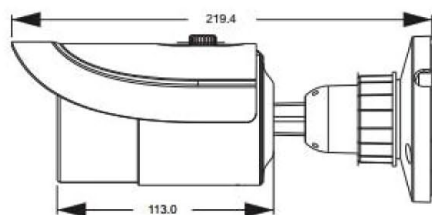

CAMERA	Image Sensor	1 / 3 "CMOS
	Effective Pixels	2688*1520
	Electronic Shutter	1/25s~ 1/100000s
	Min.Illumination	color:0.05lux@F1.2, AGC ON, B/W:0lux with IR
	Lens	3.6mm (optional 6mm/8mm) -FZ : 3.3-12mm
	Lens Angle	horizontal:50° , 80-38° (-FZ)
	Lens Mount	M12 Mount , Φ14 Mount (-FZ)
	WDR	DWDR
	BLC	Yes
	DNR	2D/3D DNR
IMAGE	Video Compression	H.265 MP、 H.264 BL/MP/HP、 MJPEG
	Audio Compression	G.711A/G.711U
	Bit-rate	64Kbps ~ 10Mbps
	Encode Mode	VBR/CBR
	Image Quality	Five Levels under VBR ; Freely adjustable under CBR
	Resolution	4MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720), D1, CIF, 480x240
	Multi-Stream	1~30fps : 4MP / 3MP / 1920x1080 / 720P / D1 / CIF
Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, ETC.	
PORT	Network	RJ45
	Video output	CVBS(BNC ×1)
	Audio	one-way audio (MIC IN ×1)
	Card Storage	NO
	RS485	NO
	Alarm Input	NO
	Alarm Output	NO
FUNCTIONS	Remote Monitoring	Browser, CMS ,mobile app
	Supported Browsers	IE/Chrome/Firefox/Safari
	Online Connection	10 online users
	Protocol	TCP/IP ,UDP, DHCP,NTP,RTSP,PPPOE,DDNS,SMTP,FTP
	Connection Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion Alarm
	Intelligent Analysis	PEA/OSC/AVD
	Day&Night	ICR
	IR Distance	20~30m
	IR LED-count	42 (Φ5 12mil) , -FZ:36 (Φ5 12mil)
	Water-proof	IP66
	OTHERS	Angle Adjustment
Power Supply		DC 12V/PoE
Power Consumption (IR Off)		< 2.5W
Power Consumption (IR On)		< 6W
Working Environment		-20°C ~ 50°C , 10% ~ 90% humidity
Dimension		Φ87mm×219mm
Weight		≈609g