


3MP HD-IP IR Bullet Camera

IP-IR3S24-3.6



FEATURES :

- ✓ 1/2.8" Sensor
- ✓ 0.07Lux@F1.2, AGC ON
- ✓ 3MP@30fps Recording
- ✓ DWDR, 3D DNR
- ✓ 2.8mm / 3.6mm Fixed Lens
- ✓ 12V DC / PoE
- ✓ IP66



AUTO WB



AGC



WEATHER PROOF



HD SENSOR



MIN. ILLUMINATION



DAY & NIGHT



www.alma-asia.com www.almacctv.com www.facebook.com/almacctv

COPYRIGHT BY ALMA TECHNOLOGY SDN. BHD. ALL RIGHT RESERVED

DISTRIBUTE BY :



Design and specifications are subject to change without notice.



3MP HD-IP IR Bullet Camera


IP-IR3S24-3.6



FEATURES :

- ✓ 1/2.8" Sensor
- ✓ 0.07Lux@F1.2, AGC ON
- ✓ 3MP@30fps Recording
- ✓ DWDR, 3D DNR
- ✓ 2.8mm / 3.6mm Fixed Lens
- ✓ 12V DC / PoE
- ✓ IP66

DIMENSIONS

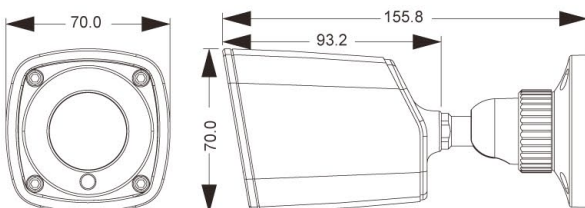

MODEL		IP-IR3S24-3.6
CAMERA		
Image Sensor		1/2.8" CMOS
Image Size		2048 x 1536
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Auto Iris		Fixed Iris
Min. Illumination		0.07 lux @F1.2,AGC ON; 0 lux with IR
Lens		3.6 mm @ F1.6, horizontal field of view: 85.8°
Lens Mount		M12
Day & Night		ICR
Wide Dynamic Range		Digital WDR
Digital NR		3D DNR
Angle Adjustment		Any angle
IMAGE		
Video Compression		H.264 / MJPEG
Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream		60Hz : 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate		128 Kbps ~ 6 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI		3 ROI
INTERFACES		
Network		RJ45
FUNCTIONS		
Remote Monitoring		IE browsing,CMS remote control
Online Connection		Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF
Storage		Network remote storage
Smart Alarm		Motion alarm
PoE		Yes
IR Distance		33 ~ 66ft (10 - 20 m)
Water-proof		IP66
OTHERS		
Power Supply		DC12V / PoE
Power Consumption		< 3W; < 5W (IR On)
Operating Environment		- 4°F ~ 122°F (- 20°C ~ 50°C), 10% ~ 90% humidity
Dimensions (mm)		2.8" x 6.1" (Φ 70 x 156)
Weight (net)		0.77Lbs (350g)