2MP AIO CAMERA

IR2C18-KF-L

2MP MEGAPIXEL

FEATURES

- Image Sensor : 1/2.9" Korea S885
- Lens : 4mm Lens
- Resolution : 1920(H) x 1080(V) 2.0MP
- IR LEDS : 18 IR LED
- IR Distance : 30M
- OSD : Yes
- Min illumination : 0.5 Lux min. illumination
- Support : CVI, TVI, AHD & CVBS
- Protection : IP66 Weather Proof
- Power Input : DC 12V
- Power Consumption : 240mA (IR ON)
- Mode change method _UTC conrol

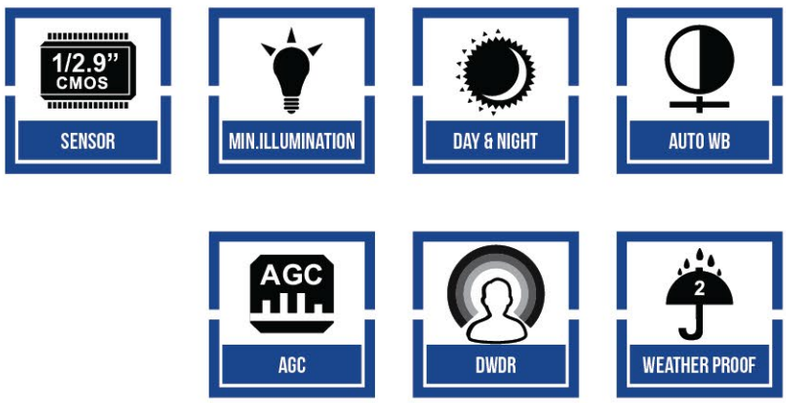

ALMA®
alma-asia

www.alma-asia.com www.almacctv.com www.facebook.com/almacctv

COPYRIGHT BY ALMA TECHNOLOGY SDN. BHD. ALL RIGHT RESERVED

DISTRIBUTE BY :

Design and specifications are subject to change without notice.

2MP AIO CAMERA

IR2C18-KF-L

FEATURES

- Image Sensor : 1/2.9″ Korea S885
- Lens : 4mm Lens
- Resolution : 1920(H) x 1080(V) 2.0MP
- IR LEDS : 18 IR LED
- IR Distance : 30M
- OSD : Yes
- Min illumination : 0.5 Lux min. illumination
- Support : CVI, TVI, AHD & CVBS
- Protection : IP66 Weather Proof
- Power Input : DC 12V
- Power Consumption : 240mA (IR ON)
- Mode change method _UTC conrol

2MP MEGAPIXEL

SPECIFICATION

Image Sensor	1/2.9" Korea S885
Picture Elements	1920(H) x 1080(V) 2.0MP
Lens	4.0MM
LED	18 IR LEDs
IR Distance	30M
Signal Format	NTSC / PAL (1280H)
Min. Illuminat on	0.5 Lux Min. Illuminat on.
Electronic Shutter	1/23s ~ 1/100,000s
3D-DNR	OFF / LOW / MIDDLE / HIGH
Digital WDR	ON / OFF
White Balance	ATW(Default) / AWB / AWC -> SET / Manual / Indoor / Outdoor
Auto Gain Control	0-15 Adj. (OSD Setting)
Day & Night Mode	External Control (Default) / Auto / Color / B&W
Video Setting	Contrast / Color Gain / DNR / Video Mode / DWDR
Coaxial Control (UTC)	YES (AHD, TVI, CVI, CVBS)
CDS Input Voltage	DC 1V - 18V (Wide Voltage)
OSD Language	English / Traditional Chinese / Simplified Chinese / Polish / Portuguese / Italian
Video Output	AHD / CVI / TVI / CVBS (6KV Lightning Protect on)
Power Supply	DC 12V (Wide Voltage 6-23V)
Power Consumption	240mA (IR ON)
Operation Temperature	-10°C ~ +50°C (-15°F to 122°F)
Storage Temperature	-40°C ~ +60°C (-40°F to 140°F)